

KNITTING PATTERN

Quartz T-shirt

Design: Tayler Harris | Hobbii Design



MATERIALS

9 (11, 13, 14) (15, 16, 18) (19, 21, 22) skeins of **Friends Cotton Silk** color 03

Circular needle 3.5 mm, 80 cm/US 4, 32" Circular needle 3.5 mm, 40 cm/US 4, 16" Circular needle 3.75 mm, 80 cm /US 5, 32" Circular needle 3.75 mm, 40 cm /US 5, 16" Circular needle 4 mm, 80 cm /US 6, 32"

Spare circular needle 3.5 mm, 40 cm /US 4, 16"

Locking stitch markers
Cable needle
Stitch holders
Blocking wires & t-pins (optional)

YARN QUALITY

Friends Cotton Silk, Hobbii 78 % Cotton, 22 % Silk 50 g / 1.8 oz = 120 m / 131 yds

GAUGE

30 sts x 35 rows = 10 cm x 10 cm / 4" x 4"

SIZES

1 (2, 3, 4) (5, 6, 7) (8, 9, 10)

MEASUREMENTS

Finished Chest Circumference: 38.5 (42.75, 47, 51.25) (55.5, 59.75, 64) (68.25, 72.5, 77)" / 98 (108.5, 119, 130) (141, 152, 162.5) (173, 184, 195.5) cm

Suggested ease: +6-10" /+15-25 cm

PATTERN INFORMATION

This lace sweater tee is a stylish and versatile addition to any wardrobe. Knit in pieces from the bottom up, the sweater begins with a classic 1x1 ribbing, leading into an eye-catching diamond cable lace pattern. The necklines and shoulders are shaped using the Sloped Bind Off Method providing a tailored fit. After seaming the front and back pieces, stitches are picked up around the armholes and neckline, and the edges are finished with 1x1 rib. This pattern offers a satisfying blend of techniques, making it an enjoyable project for knitters who love combining texture, cables, and lace.

HASHTAGS FOR SOCIAL MEDIA

#hobbiidesign #hobbiiquartz #quartztshirt #tayleranneknits

BUY THE YARN HERE

https://shop.hobbii.com/guartz-t-shirt



QUESTIONS

If you have any questions regarding this pattern, please feel free to email us at support@hobbii.com. Please make sure to include the pattern's name and number.

Happy Crafting!



Pattern







ABBREVIATIONS

BOR = Beginning of round

Cn = Cable needle

CO = Cast on

K = Knit

K1-tbl = Knit 1 stitch through the back loop

K2tog = Knit 2 stitches together

LH = Left hand

P = Purl

Pm = Place marker

Rep = Repeat

RH = Right hand

RS = Right side

Sm = Slip marker

Ssk = Slip, slip, knit; slip 2 stitches one at a time knitwise to the right-hand needle; insert the left-hand needle into the fronts of these 2 stitches and knit them together

St(s) = Stitch(es)

WS = Wrong side

Wyif = With yarn in front

Yo = Yarnover

SPECIAL TECHNIQUES

LONG-TAIL TUBULAR CAST ON

Step 1: With a tail long enough to create the desired number of stitches, make a slipknot and slip it onto needle. Pull snugly.

Step 2: With the bottom three fingers of your left hand, grab both strands of yarn and hold them in your palm. Take your index finger and thumb and push them through the two strands; shift them backwards to pull yarn tight to create a slingshot shape.

Step 3: From back to front in a towards-you motion, dip the needle under the yarn coming off your left index finger. Then, from front to back in an away-from-you motion, grab the yarn coming off your thumb, then pass the needle under the yarn coming off your index finger. Gently pull to tighten. This is a purl stitch.

Step 4: From front to back in an away-from-you motion, grab the yarn coming off your thumb. Then, from back to front in a towards-you motion, grab the yarn coming off your index finger



and pass the needle under the yarn coming off your thumb. Gently pull to tighten. This is a knit stitch.

Repeat Steps 3 – 4 until all sts have been cast on.

SLOPED BIND OFF

- Step 1. Work the first BO rows at the garment edges as usual.
- Step 2. Work to the last st of the row before the next BO row, then turn work.
- Step 3. Slip the first st on the left needle purlwise to the right needle, then pass the unworked st of the previous row over the slipped st, binding off 1 st.
- Step 4. BO the remaining required number of sts as usual.
- Repeat Steps 2 4 to BO remaining sts as called for in pattern.

KITCHENER STITCH


- Step 1: Insert the tapestry needle through the first stitch on the front needle as if to purl. Pull the yarn through, leaving the stitch on the needle.
- Step 2: Insert the tapestry needle through the first stitch on the back needle as if to knit. Pull the yarn through, leaving the stitch on the needle.
- Step 3: Insert the tapestry needle through the first stitch on the front needle as if to knit. Pull the yarn through and remove the stitch from the needle.
- Step 4: Insert the tapestry needle through the first stitch on the front needle as if to purl. Pull the yarn through, leaving the stitch on the needle.
- Step 5: Insert the tapestry needle through the first stitch on the back needle as if to purl. Pull the yarn through and remove the stitch from the needle.
- Step 6: Insert the tapestry needle through the first stitch on the back needle as if to knit. Pull the yarn through, leaving the stitch on the needle.


Repeat Steps 3 – 6 until all sts have been worked.



STITCH PATTERNS & CHARTS

Quartz Lace Cable Pattern

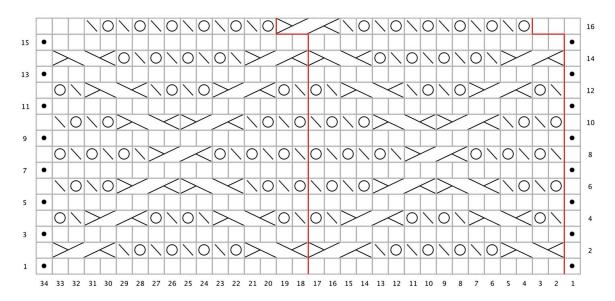

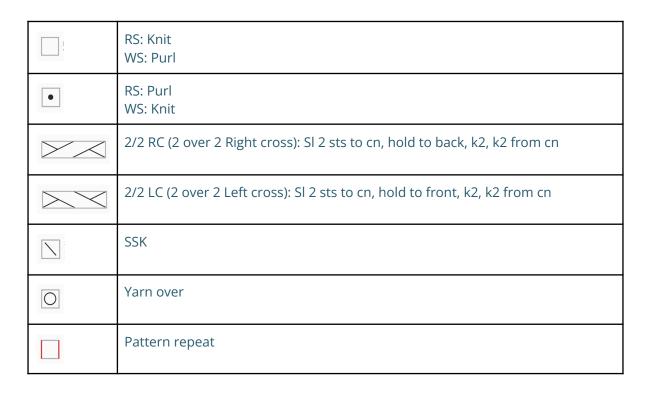



BACK

Cast On Hem

Loosely CO 146 (162, 178, 194) (210, 226, 242) (258, 274, 290) sts onto 3.5 mm / US 4, 80 cm / 32" circular needle, using the the Long-Tail Tubular Cast On Method; [See Special Techniques]. The first st you cast on, after the beginning slipknot, should be a knit st, and you will end with a knit st. Do not join.

Foundation Row 1: *SI 1 purlwise wyif, k1-tbl, rep from * to last 2 sts, sI 1 purlwise wyif, k1.

Foundation Row 2: K2, *sl 1 purlwise wyif, k1, rep from * to end of row.

Foundation Row 3: K2, *p1, k1, rep from * to end of row.

Ribbing

Change to 3.75 mm / US 5, 80 cm / 32" circular needle.

Row 1: K2, *p1, k1, rep from * to end of row.

Rep Row 1 until ribbing measures approximately 4 cm / 1.5" from cast-on edge.

NOTE: The next row you work will be a WS row.

Main Fabric

Change to 4 mm / US 6, 80 cm / 32" circular needle.

Begin Quartz Lace Cable pattern, (see Stitch Patterns & Charts), working Rows 1-16 until piece measures approximately 25 cm / 10" from cast-on edge, ending with Row 9.

NOTE: You can lengthen or shorten the body of your sweater here, keeping in mind lengthening may require more yarn.

Armholes

Place a removable st m on the first and last st of the row to mark the base of the Armholes.

Continue working in pattern as established, working and repeating the Diamond Lace Cable pattern, until Armholes measure approximately 20 (21, 22, 24) (25, 26, 27) (28.5, 30.5, 31) cm / 7.75 (8.25, 8.75, 9.5) (9.75, 10.25, 10.75) (11.25, 12, 12.25)" from removable st markers, ending with a wrong-side row.***

Shape Shoulders & Neckline

NOTE: Use the Sloped Bind Off Method for best results. See Special Techniques Section.

Continuing to work in pattern as established, BO 3 (4, 5, 4) (6, 6, 5) (6, 6, 6) sts at the beginning of the next 28 (10, 8, 32) (14, 16, 28) (28, 28, 36) rows, then 0 (3, 3, 0) (3, 3, 4) (2, 4, 0) sts at the beginning of the next 0 (20, 24, 0) (20, 20, 8) (8, 8, 0) rows. [62 (62, 66, 66) (66, 70, 70) (74, 74, 74) sts remain for Back]

Next Row (right side): BO remaining sts in pattern. Break yarn.

FRONT

Work as for Back until ***.



Shape Shoulders & Neckline

NOTE: Use the Sloped Bind Off Method for best results. See Special Techniques Section.

Continuing to work in pattern as established, BO 3 (4, 5, 4) (6, 6, 5) (6, 6, 6) sts at the beginning of the next 2 (4, 6, 6) (6, 8, 8) (6, 6, 6) rows. [140 (146, 148, 170) (174, 178, 202) (222, 238, 254) sts]

Next Row (right side): BO 3 (4, 5, 4) (6, 6, 5) (6, 6, 6) sts (1 st remains on right needle), work 57 (59, 58, 70) (70, 71, 84) (92, 100, 108) sts in pattern, place previous 58 (60, 59, 71) (71, 72, 85) (93, 101, 109) sts onto scrap yarn or st holder for Left Front; BO next 18 (18, 20, 20) (20, 22, 22) (24, 24, 24) sts for Neckline; work in pattern to end of row. [61 (64, 64, 75) (77, 78, 90) (99, 107, 115) sts remain for Right Front]

RIGHT FRONT

NOTE: Neck and Shoulder shaping are worked concurrently – please read through the next section carefully before proceeding. Use the Sloped Bind Off Method for best results.

Continuing in pattern as established, at the beginning of wrong-side rows, BO 3 (4, 5, 4) (6, 6, 5) (6, 6, 6) sts 13 (3, 1, 13) (4, 4, 10) (11, 11, 15) time(s), then 0 (3, 3, 0) (3, 3, 4) (2, 4, 0) sts 0 (10, 12, 0) (10, 10, 4) (4, 4, 0) times, and AT THE SAME TIME, shape Neckline as follows:

At the beginning of right-side rows, BO 2 (2, 3, 3) (3, 2, 2) (3, 3, 3) sts 11 (11, 1, 1) (1, 12, 12) (1, 1, 1) time(s), then 0 (0, 2, 2) (2, 0, 0) (2, 2, 2) sts 0 (0, 10, 10) (10, 0, 0) (11, 11, 11) times.

When shaping is complete, all Right Front sts are bound off.

LEFT FRONT

NOTE: Neck and Shoulder shaping are worked concurrently – please read through the next section carefully before proceeding. Use the Sloped Bind Off Method for best results.

Return Left Front sts to needle, and rejoin yarn, ready to work a wrong-side row.

Continuing in pattern as established, at the beginning of wrong-side rows, BO 2 (2, 3, 3) (3, 2, 2) (3, 3, 3) sts 11 (11, 1, 1) (1, 12, 12) (1, 1, 1) time(s), then 0 (0, 2, 2) (2, 0, 0) (2, 2, 2) sts 0 (0, 10, 10) (10, 0, 0) (11, 11, 11) times, and AT THE SAME TIME, shape Shoulder as follows:

At the beginning of right-side rows, BO 3 (4, 5, 4) (6, 6, 5) (6, 6, 6) sts 12 (2, 0, 12) (3, 3, 9) (10, 10, 14) time(s), then 0 (3, 3, 0) (3, 3, 4) (2, 4, 0) sts 0 (10, 12, 0) (10, 10, 4) (4, 4, 0) times.

When shaping is complete, all Left Front sts are bound off.

WET-BLOCK

Wash Front and Back pieces, allowing them to soak a minimum of 45 minutes in lukewarm water with wool wash. Gently remove excess water by rolling the pieces between two thick towels. Pin and shape pieces to measurements on schematic, (using blocking wires if desired), and allow to dry completely.

SEAM

NOTE: Sew all seams using Mattress Stitch, (or preferred invisible method).



With right-sides facing out, sew Shoulder seams together starting from the Armhole edges, and sewing up to Neck edges. Sew side seams together, starting from bottom edge and ending at base of Armholes at locking st m.

ARMHOLE RIBBING

Using 3.75 mm / US 5, 40 cm / 16" circular needle, with right-side facing, and beginning at underarm seam, join yarn and pick up and k54 (58, 62, 67) (69, 73, 76) (80, 86, 88) sts up Armhole edge to Shoulder seam, and 54 (58, 62, 67) (69, 73, 76) (80, 86, 88) sts down Armhole edge to underarm. [108 (116, 124, 134) (138, 146, 152) (160, 172, 176) sts] Pm and join to work in the round.

Rnd 1: *K1, p1, rep from * to end of rnd.

Rep Rnd 1 until ribbing measures approximately 3 cm / 1.25".

BIND OFF

Change to 3.5 mm / US 4, 40 cm / 16"

Set-up Rnd 1: *K1, sl 1 purlwise wyif, rep from * to end of rnd.

Set-up Rnd 2: *Sl 1 purlwise wyib, p1, rep from * to end of rnd.

Set-up Rnd 3: SI each st purlwise, slipping the knit sts onto working needles, and the purl sts onto spare set of needles.

Break yarn leaving a tail four times the length of the sts that are to be bound off. Use the Kitchener Stitch to bind off all sts; [See Special Techniques].

Repeat instructions for the second Armhole.

NECKBAND

With right-side facing and 3.75 mm / US 5, 40 cm / 16" circular needle, begin at Right Shoulder, pick up and k62 (62, 66, 66) (66, 70, 70) (74, 74, 74) along Back Neckline, and 80 (80, 84, 84) (84, 88, 88) (92, 92, 92) sts along Front Neckline. [142 (142, 150, 150) (150, 158, 158) (166, 166, 166) sts]. Pm for BOR.

Rnd 1: *K1, p1, rep from * to end of rnd.

Rep Rnd 1 until ribbing measures approximately 3 cm / 1.25".

BIND OFF

Change to 3.5 mm / US 4, 40 cm / 16"

Set-up Rnd 1: *K1, sl 1 purlwise wyif, rep from * to end of rnd.

Set-up Rnd 2: *Sl 1 purlwise wyib, p1, rep from * to end of rnd.

Set-up Rnd 3: SI each st purlwise, slipping the knit sts onto working needles, and the purl sts onto spare set of needles.

Break yarn leaving a tail four times the length of the sts that are to be bound off. Use the Kitchener Stitch to bind off all sts; [See Special Techniques].

Weave in all ends. You may steam seams and Neckband gently, or wet-block entire garment again.

Enjoy!

Tayler Harris

